LCD Module User Manual

Customer	:	
Ordering Part Number	:	GG12864H-B
DRAWING NO.	:	GG12864J1-02WA0_A00

Approved By Customer:

Date:

Approved By	Checked By	Prepared By

GEMINI Technology CO., Ltd.

ADD: RM1521 Investel, #1123-2 Sanbon-dong, Gunpo-city,
Kyeongki-do, 435-040 Korea

TEL: +82-31-455-3200 FAX: +82-31-343-2102

E-mail: sales@findlcd.com Http://www.findLCD.com

Contents

1. Precautions in Use of LCD Module----------P3
2. General Specification----------P3
3. Absolute Maximum Ratings----------P3
4. Electrical Characteristics----------P4
5. Backlight Information----------P4
6. Optical Characteristics----------P5
7. Interface Description----------P6
8. Contour Drawing & Block Diagram----------P7
9. Application circuit----------P8
10. LCD Function Description----------P8
11. User instruction Definitions----------P16
    11.1 Instruction table----------P16
    11.2 Instruction description ----------P17
12. Timing Characteristics ----------P24
13. Initializing flow chart ----------P27
14. Display Data RAM Map ----------P31
15. Revision records----------P32

1. Precautions in Use of LCD Module

(1) Avoid applying excessive shocks to the module or making any alterations or modifications to it.
(2) Don't make extra holes on the printed circuit board, modify its shape or change the components of LCD Module.
(3) Don't disassemble the LCM.
(4) Don't operate it above the absolute maximum rating.
(5) Don't drop, bend or twist LCM.
(6) Soldering: only to the I/O terminals.
(7) Storage: please storage in anti-static electricity container and clean environment.

2. General Specification

ITEM	STANDARD VALUE	UNIT
Number of dots	128X64 Dots	Dots
Outline dimension	93.7(W)X53.0(H)X5.5MAX.(T)	mm
View Area	70.7(W)X38.8(H)	mm
Active area	66.52(W)X33.24(H)	mm
Dot size	0.48(W)X0.48(H)	mm
Dot pitch	0.52(W)X0.52(H)	mm
LCD type	STN,Blue,Negative ,transmissive	
View direction	6 o'clock	
Backlight	White LED	
Controller	Sitronix ST7565R	
Interface Type	Parallel interface,8080 series	

3. Absolute Maximum Ratings

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Temperature	T_{OP}	-20	-	+70	℃
Storage Temperature	T_{ST}	-30	-	+80	℃
Input Voltage	V_I	0	-	V_{DD}	V
Supply Voltage For Logic	V_{DD}	0	-	3.6	V
Supply Voltage For LCD	V_{DD}-V_{EE}	0	-	13.0	V

4. Electrical Characteristics

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Logic Voltage	V_{DD}-V_{SS}	-	2.8	3.0	3.3	V
Supply Volt.For LCD	V_{DD}-V_O	Ta=25℃	---	9.0	---	V
Input High Volt.	V_{IH}	-	2.0	-	V_{DD}	V
Input Low Volt.	V_{IL}	-	-0.3	-	0.8	V
Output High Volt.	V_{OH}	I_{oH}=-0.2mA	2.4	-	V_{DD}	V
Output Low Volt.	V_{OL}	I_{oL}=1.6mA	0	-	0.4	V
Supply Current	I_{DD}	-	---	---	1.0	mA

5. Backlight Information

Absolute Maximum ratings (Ta=25℃)

Item	Symbol	Conditions	Rating	Unit
Reverse voltage	Vr	-	3.5	V
Reverse Current	I_r	-	20	uA
Absolute maximum forward Current	Ifm	---	100	mA
Peak forward current	Ifp	1msec plus 10% Duty Cycle	30	mA
Power dissipation	P_d		300	mW
Operating Temperature Range	T_{oper}		-25~+70	℃
Storage Temperature Range	Tst		-40~+80	℃

Electrical/Optical Characteristics (Ta=25^{0}C,If=100mA)

Color	Wavelength λp(nm)	Spectral line half width Δλ(nm)	Operating Voltage(v) (±0.15V)	Forward Current (mA)
White	---	---	3.1	100

6. Optical Characteristics

ITEM	SYMBOL	CONDITION	MIN	TYP	MAX	UNIT
View Angle	(V) θ	CR≧2	10	–	120	deg.
	(H) ϕ	CR≧2	-45	–	45	deg.
Contrast Ratio	CR	–	–	5	–	–
Response Time	T rise	–	–	200	300	ms
	T fall	–	–	150	200	ms

■View Angles

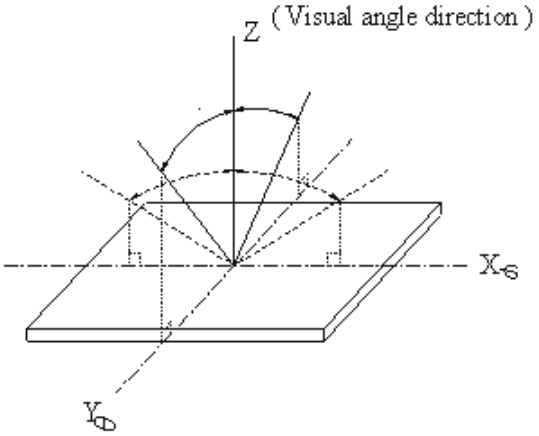

■Contrast Ratio

$$CR = \frac{\text{Brightness at selected state (BS)}}{\text{Brightness at non-selected state (Bns)}}$$

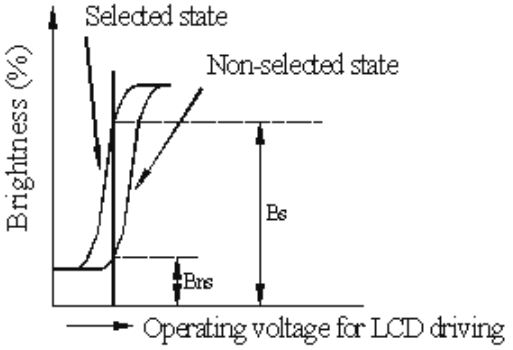

■Response time

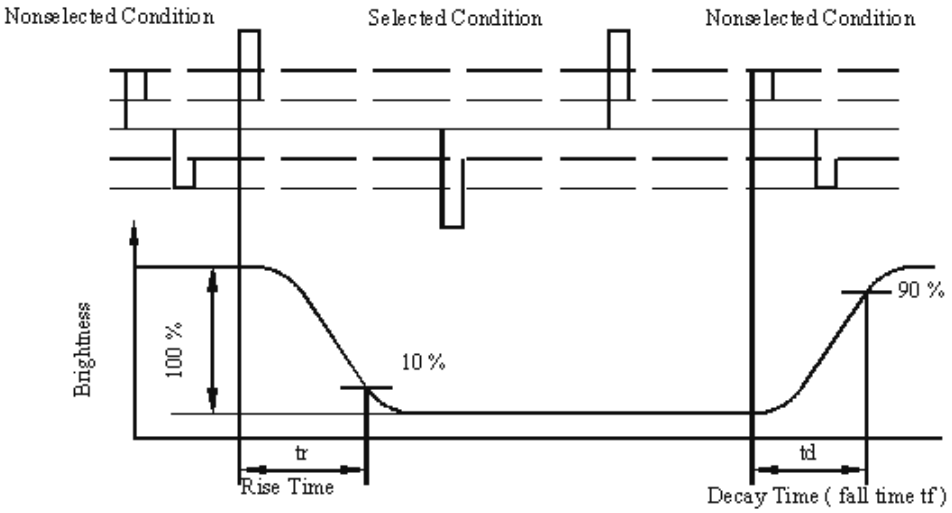

7.Interface Description

Parallel interface,8080 series

Pin No.	Symbol	Level	Description
1	/CS	L	Chip select input pins.ActiveLow
2	/RST(/RES)	L	When /RST is "L", initialization is executed.
3	A0(D/I,RS)	H/L	Register select input pin A0 = "H": Indicates that "A0" are display data A0 = "L": Indicates that "A0" are control data
4	/WR(R/W)	H/L	When connected to an 8080 MPU Write signal. Low active . When connected to a 6800 Series MPU: This is the read/write control signal input terminal. When R/W = “H”: Read. When R/W = “L”: Write.
5	/RD(E)	H/L	When connected to an 8080 MPU, this is Read signal. Low active. When connected to a 6800 Series MPU. This is the 6800 Series MPU enable clock input terminal.
6~13	DB0~DB7	H/L	Parallel mode:Data bus DB0~DB7. Serial mode: DB6: Serial input clock SCLK DB7: Serial input data SID
14	V_{DD}	3.3V	Power supply for Logic
15	V_{SS}	0V	Ground
16	V_{OUT}	---	DC/DC converter. Connect a capacitor to ground
17	CAP3+	---	DC/DC converter. Connect a capacitor to CAP1-
18	CAP1-	---	DC/DC converter. Connect a capacitor to CAP1+
19	CAP1+	---	DC/DC converter. Connect a capacitor to CAP1-
20	CAP2+	---	DC/DC converter. Connect a capacitor to CAP2-
21	CAP2-	---	DC/DC converter. Connect a capacitor to CAP2+
22	V4	---	Voltage levels for LCD. Connect a capacitor to ground
23	V3	---	Voltage levels for LCD. Connect a capacitor to ground
24	V2	---	Voltage levels for LCD. Connect a capacitor to ground
25	V1	---	Voltage levels for LCD. Connect a capacitor to ground
26	V0	---	Voltage levels for LCD. Connect a capacitor to ground
27(RED)	A	+4.2V	Anode of LED Backlight
28(Black)	K	0V	Cathode of LED Backlight

8. Contour Drawing & Block Diagram

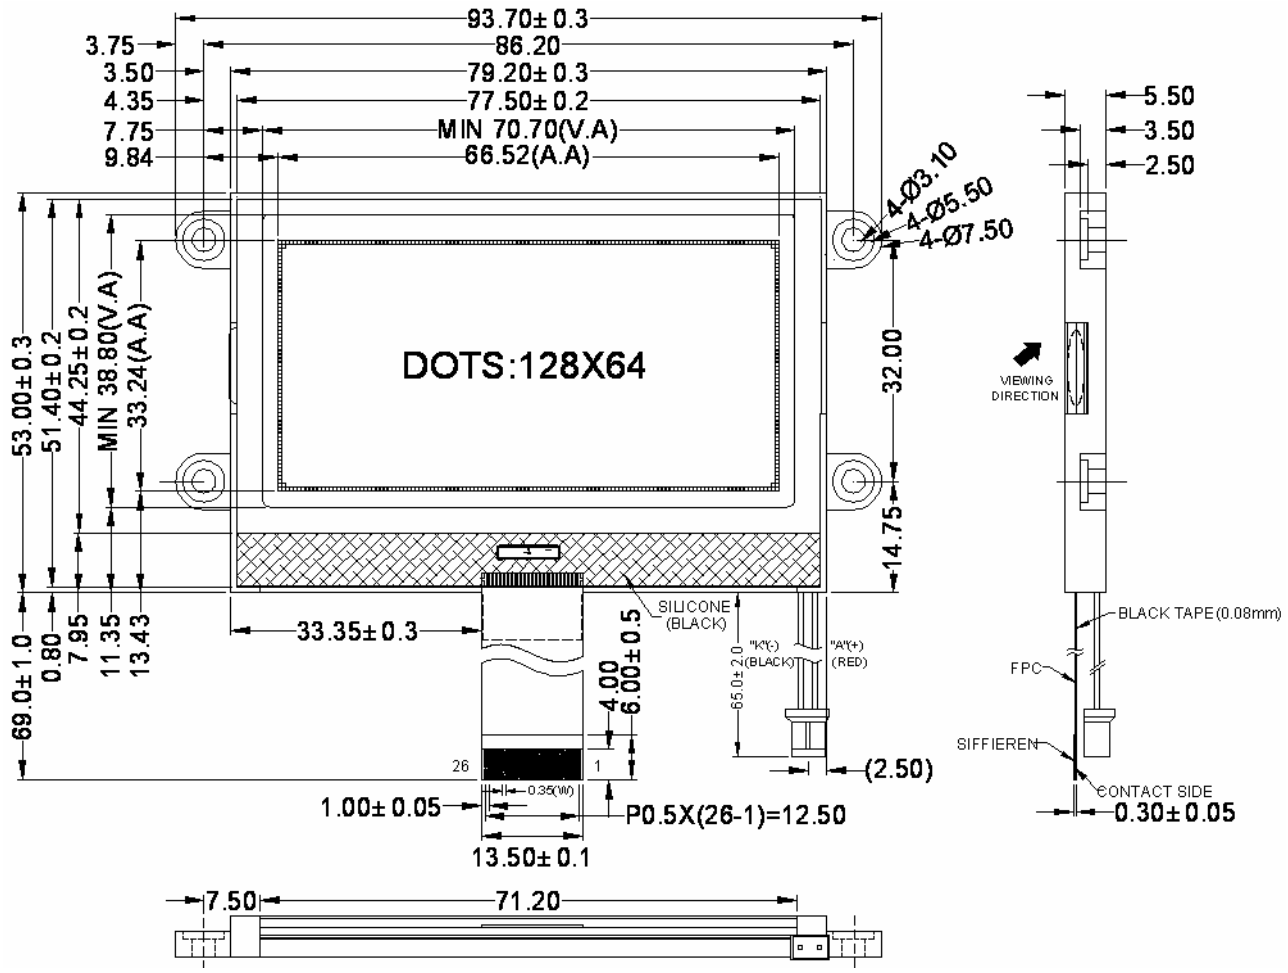

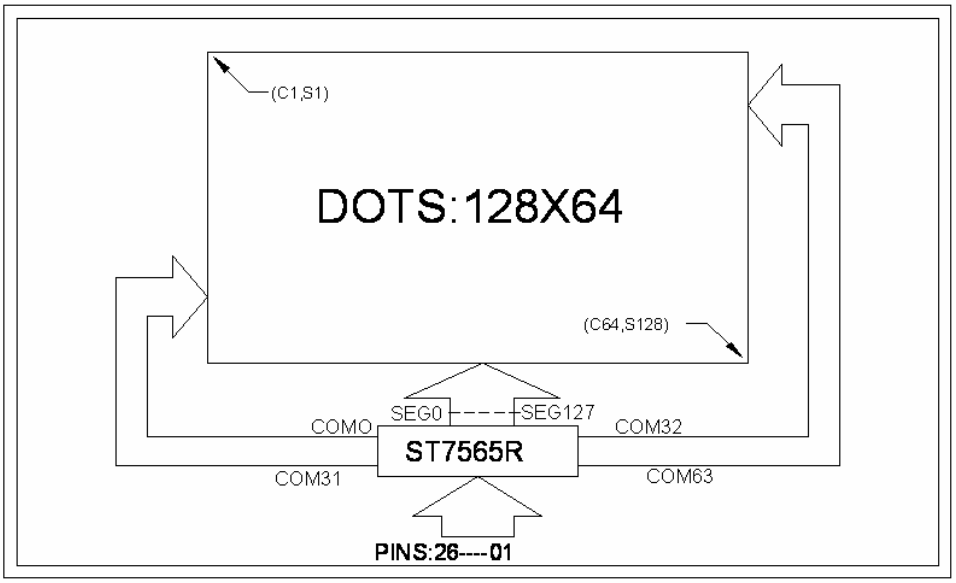

LED backlight details

LED BACKLIGHT
FOR LCD DISPLAY

1. MECHANICAL OUTLINE

(Unspecified Tolerances is) .xx ± 0.3
.x ± 0.5

COLOR : WHITE

UNIT: mm

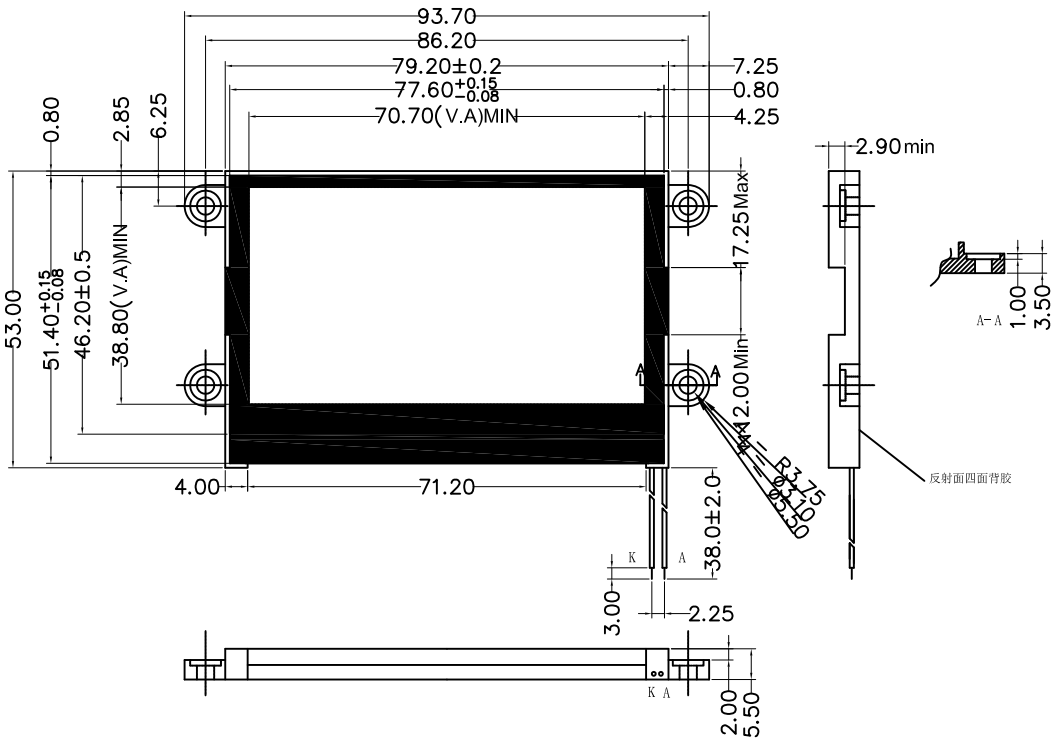

2. ??? CIRCUIT DIAGRAM (LED1*5=5dies)

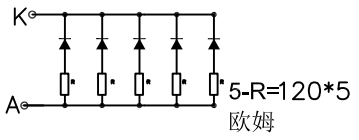

NOTE:
1.(): REFERENCE DIMENSION.
2.▽ : SPECIAL CHARACTERISTIC.

3. STORAGE & SOLDERING CONDITIONS:

- Store with care. Storing the units in bad condition will cause the reflector sheet and decrease it's adhesive power. Storage The products under the condition: temperature (25°c ±10°C) and humidity (65%RH±20%RH) our recommendation.

9. Application circuit

9.1 Parallel mode,8080 Series MPU interface

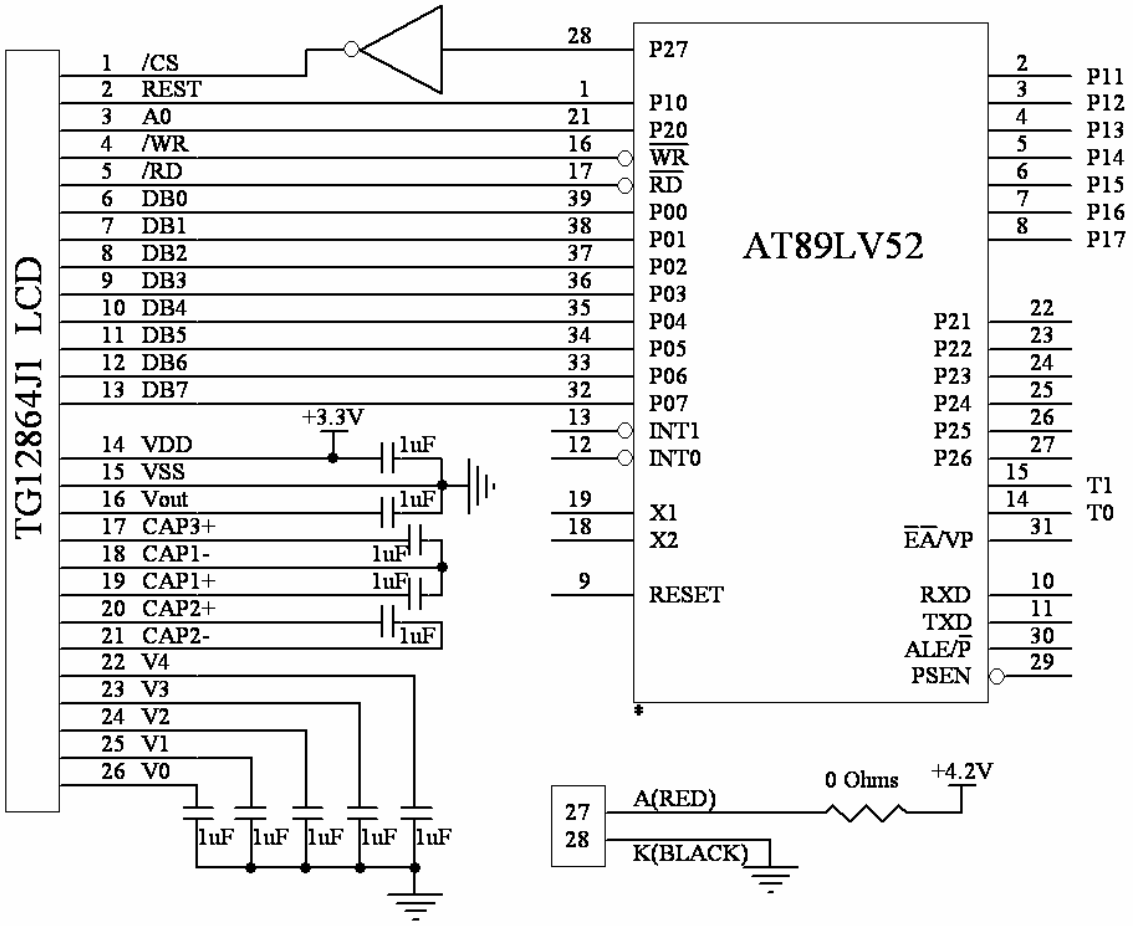

10. LCD Function Description

The LCD built-in Sitronix ST7565R. ST7565R is a single chip driver & controller LSI for graphic dot-matrix liquid crystal display systems. This chip can be connected directly to a microprocessor, accepts serial or 8-bit parallel display data from the microprocessor, stores the display data in an on-chip display data RAM of 65 x 132 bits and generates a liquid crystal display drive signal independent of the microprocessor. It provides a high-flexible display section due to 1-to-1 correspondence between on-chip display data RAM bits and LCD panel pixels. It contains 65 common driver circuits and 132 segment driver circuits, so that a single chip can drive a 65 x 132 dot display. And the capacity of the display can be increased through the use of master/slave multi-chip structures.

These chip are able to minimize power consumption because it performs display data RAM read/write operation with no external operation clock. In addition, because it contains power supply circuits necessary to drive liquid crystal,which is a display clock oscillator circuit, high performance voltage converter circuit, high-accuracy voltage regulator circuit, low power consumption voltage divider resistors and OP-Amp for liquid crystal driver power voltage, it is possible to make the lowest power consumption display system with the fewest components for high performance portable systems.

On-chip Display Data RAM

-Capacity: 65 x 132 = 8,580 bits

-RAM bit data “1”: a dot of display is illuminated.

-RAM bit data “0”: a dot of display is not illuminated.

Various Function Set

-Display ON/OFF, set initial display line, set page address, set column address, read status, write/ read display data, select segment driver output, reverse display ON/OFF, entire display ON/OFF, select LCD bias, set/reset modify-read, select common driver output, control display power circuit, select internal regulator resistor ratio for V0 voltage regulation, electronic volume, set static indicator state.

-H/W and S/W reset available

-Static drive circuit equipped internally for indicators with 4 flashing modes

Built-in Analog Circuit

-On-chip oscillator circuit for display clock (external clock can also be used)

-High performance voltage converter (with booster ratios of x2, x3, x4 and x5, where the step-up reference voltage can be used externally)

-High accuracy voltage regulator (temperature coefficient: -0.05%/ºC or external input)

-Electronic contrast control function (64 steps)

-Vref = 2.1V±3% (V0 voltage adjustment voltage)

-High performance voltage follower (V1 to V4 voltage divider resistors and OP-Amp for increasing drive capacity)

Operating Voltage Range

- Supply voltage (VDD): 2.4 to 3.6 V

- LCD driving voltage (VLCD = V0 - VSS): 4.5 to 13.0 V

Low Power Consumption

-Operating power: 400uA typical. (Condition: VDD = 3V, x 4 boosting(VCI is VDD),V0 = 11V, internal power supply ON, display OFF and normal mode is selected)

-Standby power: 30uA maximum. (During power save [standby] mode)

Microprocessor interface

-High-speed 8-bit parallel interface with 6800-series or 8080-series.

-Serial interface (only write operation) available.

Chip Select Input

There are /CS1 pins for chip selection. The LCM can interface with an MPU only when /CS is "L" . When these pins are set to any other combination, RS, E_RDB, and RW_WRB inputs are disabled and DB0 to DB7 are to be high impedance. And, in case of serial interface, the internal shift register and the counter are reset.

Parallel / Serial Interface

LCM used ST7565P has three types of interface with an MPU, which are one serial and two parallel interfaces.

The interface type is determined by P/S pin as shown in following table.

P/S	Interface Type	CS1B	Interface mode
H	Parallel	/CS	6800-series MPU mode
			8080-series MPU mode
L	Serial(Default Status)	/CS	Serial-mode

Parallel interface (P/S = "H")

The 8-bit bi-directional data bus is used in parallel interface and the type of MPU is selected by C68 as shown in following table.

Microprocessor Selection for Parallel Interface

C86	CS1B	RS	E_RDB	RW_WRB	DB0 to DB7	Interface mode
H	/CS	RS	E	RW	DB0 to DB7	6800-series
L	/CS	RS	/RDB	/WR	DB0 to DB7	8080-series

The type of data transfer is determined by signals at RS, E_RDB and RW_WRB as following Table.

Parallel Data Transfer

Command	6800-series		8080-series		Description
A0(RS)	E_RDB	RW_WRB	E_RDB	RW_WRB	
H	H	H	L	H	Display data read out
H	H	L	H	L	Display data write
L	H	H	L	H	Register status read
L	H	L	H	L	Writes to internal register (instruction)

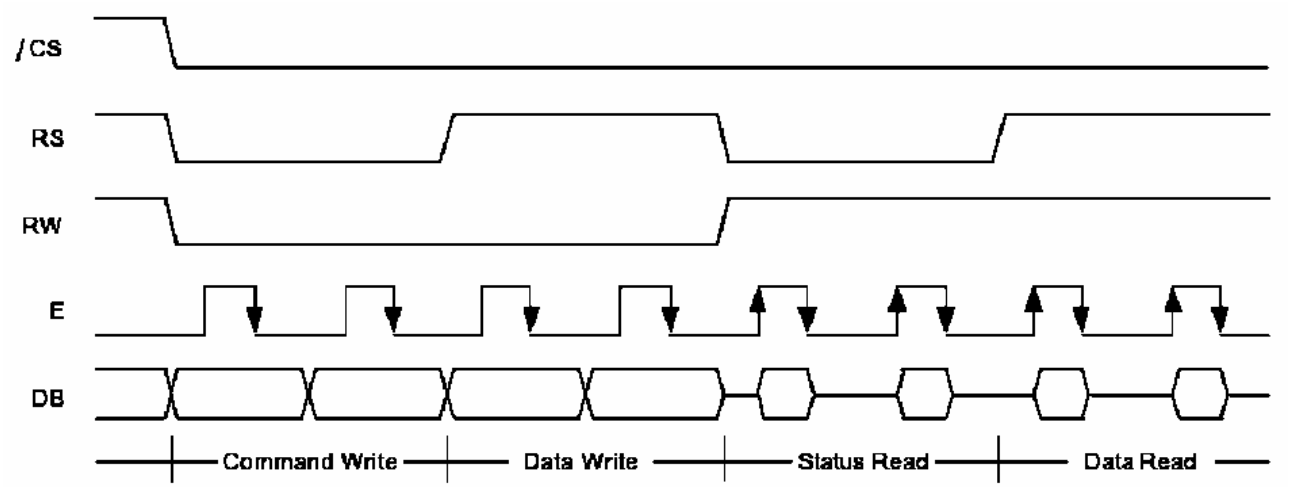

Figure 1. 6800 -Series MPU Interface protocol (P/S="H", C86="H")

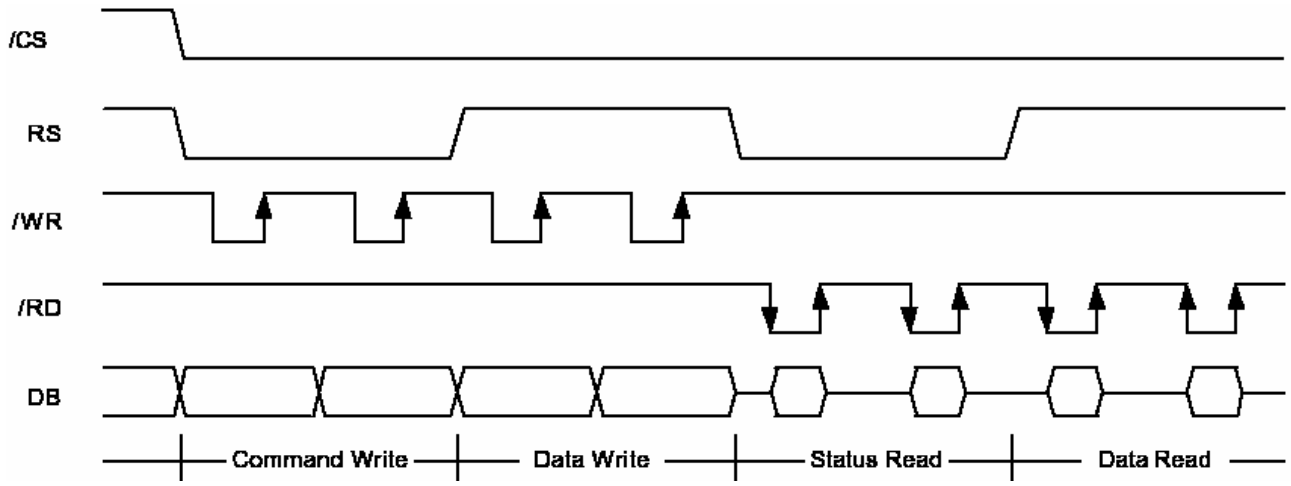

Figure 2. 8080 -Series MPU Interface Protocol (P/S="H", C86="L")

Serial Interface (PS = "L", RS=0 Ohms,RP open)

When the ST7565P is active, serial data (DB7) and serial clock (DB6) inputs are enabled. And not active, the internal 8-bit shift register and the 3-bit counter are reset. Serial data can be read on the rising edge of serial clock going into DB6 and processed as 8-bit parallel data on the eighth serial clock. Serial data input is display data when A0(RS) is high and control data when A0(RS) is low. Since the clock signal (DB6) is easy to be affected by the external noise caused by the line length, the operation check on the actual machine is recommended.

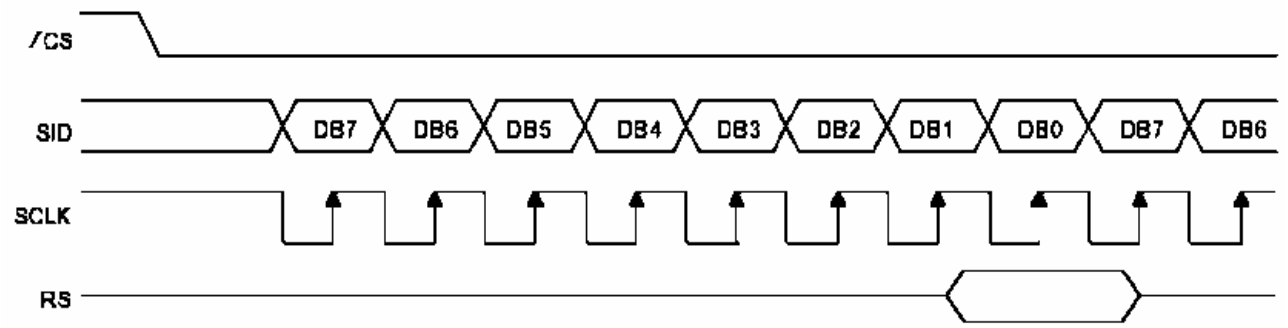

Figure 3. Serial Interface Protocol

Busy Flag (For parallel interface only)

The Busy Flag indicates whether the LCM is operating or not. When DB7 is "H" in read status operation, this device is in busy status and will accept only read status instruction. If the cycle time is correct, the microprocessor needs not to check this flag before each instruction, which improves the MPU performance.

DISPLAY DATA RAM (DDRAM)

The Display Data RAM stores pixel data for the LCD. It is 65-row by 132-column addressable array. Each pixel can be selected when the page and column addresses are specified. The 65 rows are divided into 8 pages of 8 lines and the 9th page with a single line (DB0 only). Data is read from or written to the 8 lines of each page directly through DB0 to DB7. The microprocessor can read from and write to RAM through the I/O buffer. Since the LCD controller operates independently, data can be written into RAM at the same time as data is being displayed without causing the LCD flicker.

Page Address Circuit

The LCM incorporates 4-bit Page A ddress register changed by only the "Set Page" instruction. Page Address 8 (DB3 is "H", but DB2, DB1 and DB0 are "L") is a special RAM area for the icons and display data DB0 is only valid.When Page Address is above 8, it is impossible to access to on-chip RAM. See in “Display Data RAM Map”

Line Address Circuit .

This circuit assigns DDRAM a Line Address corresponding to the first line (COM0) of the display. Therefore, by setting line address repeatedly, it is possible to realize the screen scrolling and page switching without changing the contents of on-chip RAM as shown in “Display Data RAM Map” It incorporates 6-bit line address register changed by only the initial display line instruction and 6-bit counter circuit. At the beginning of each LCD frame, the contents of register are copied to the line counter which is increased by CL signal and generates the Line Address for transferring the 132-bit RAM data to the display data latch circuit. However, display data of icons are not scrolled because the MPU can not access Line Address of icons.

Column Address Circuit

Column Address circuit has an 8-bit preset counter that provides column address to the Display Data RAM. When set Column Address MSB / LSB instruction is issued, 8-bit [Y7:Y0] is updated. And, since this address is increased by 1 each a read or write data instruction, microprocessor can access the display data continuously. However, the counter is not increased and locked if a non-existing address above 84H. It is unlocked if a column address is set again by set Column Address MSB / LSB instruction. And the Column Address counter is independent of page address register. ADC select instruction makes it possible to invert the relationship between the Column Address and the segment outputs. It is necessary to rewrite the display data on built-in RAM after issuing ADC Select instruction.

RESET CIRCUIT

Setting /RST to "L" or Reset instruction can initialize internal function.
When /RST becomes "L", following procedure is occurred.
Display ON / OFF: OFF
Entire display ON / OFF: OFF(normal)
ADC select: OFF(normal)
Reverse display ON / OFF: OFF(normal)
Power control register (VC, VR, VF) = (0, 0, 0)
Serial interface internal register data clear
LCD bias ratio: 1/9 (1/65 duty), 1/8 (1/55 duty), 1/8 (1/49duty),1/6 (1/33 duty)
On-chip oscillator OFF
Power save release
Read-modify-write: OFF
SHL select:OFF (normal)
Static indicator mode: OFF
Static indicator register: (S1, S0) = (0, 0)
Display start line: 0 (first) Column address: 0
Page address: 0
Regulator resistor select register: (R2, R1, R0) = (1, 0, 0)
Reference voltage set: OFF
Reference voltage control register: (SV5, SV4, SV3, SV2, SV1, SV0) = (1, 0, 0, 0, 0, 0)
While /RST is "L" or Reset instruction is executed, no instruction except read status could be accepted. Reset status appears at DB4. After DB4 becomes "L", any instruction can be accepted. RESETB must be connected to the reset pin of the MPU, and initialize the MPU and this LSI at the same time. The initialization by RESETB is essential before used.

POWER SUPPLY CIRCUITS

The Power Supply circuits generate the voltage levels necessary to drive liquid crystal driver circuits with low power consumption and the fewest components. There are voltage converter circuits, voltage regulator circuits, and voltage follower circuits. They are valid only in master operation and controlled by power control instruction. For details, refers to "Instruction Description".

Voltage Converter Circuits

These circuits boost up the electric potential between VCI and VSS to 2, 3, 4 or 5 times toward positive side and boosted voltage is outputted from VOUT pin. These LCM fixed to 4 times.

Voltage Regulator Circuits

The function of the internal Voltage Regulator circuits is to determine liquid crystal operating voltage, V0, by adjusting resistors, Ra and Rb, within the range of |V0| < |VOUT|. Because VOUT is the operating voltage of operational-amplifier circuits, it is necessary to be applied internally or externally. For the Eq. 1, we determine V0 by Ra, Rb and VEV. The Ra and Rb are connected internally or externally by INTRS pin. And VEV called the voltage of electronic volume is determined by Eq. 2, where the parameter a is the value selected by instruction, "Set Reference Voltage Register", within the range 0 to 63. VREF voltage at Ta= 25℃ is shown in table 1.

$V0 = (1 + Rb / Ra) \times V_{EV}$ [V] ------ (Eq. 1)

$V_{EV}=(1-(63-a)/162) \times V_{REF}$ [V]-------(Eq. 2)

Table 1. VREF Voltage at Ta = 25 ℃

REF	Temp. coefficient	VREF [V]
H	-0.05% / ℃	2.1
L	External input	VEXT

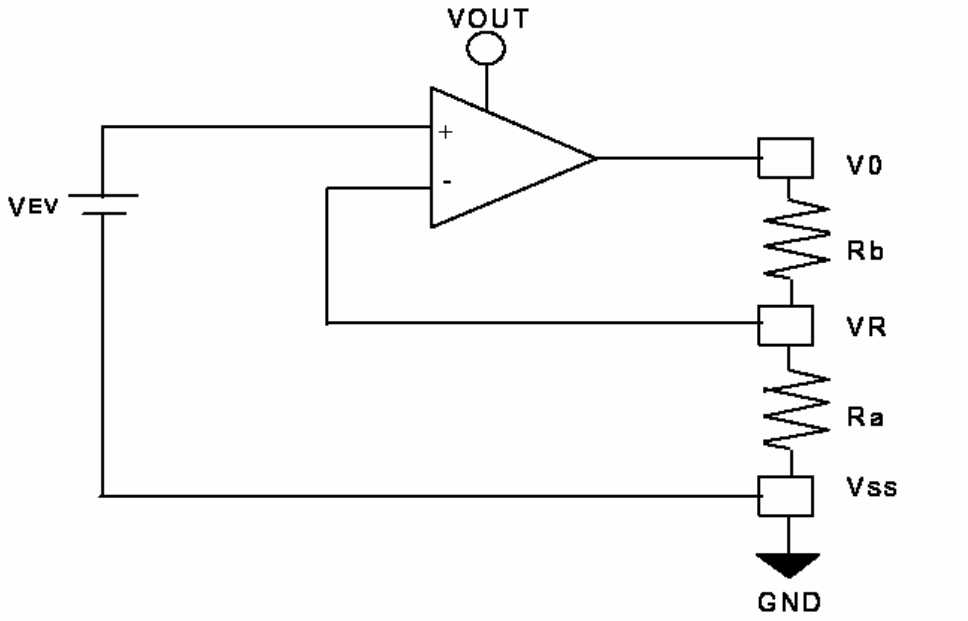

Figure 4. Internal Voltage Regulator Circuit

In Case of Using Internal Resistors, Ra and Rb. (INTRS = "H")

When INTRS pin is "H", resistor Ra is connected internally between VR pin and VSS, and Rb is connected between V0 and VR. We determine V0 by two instructions, "Regulator Resistor Select" and "Set Reference Voltage".

The following figure shows V0 voltage measured by adjusting internal regulator resistor ratio (Rb / Ra) and 6-bit electronic volume registers for each temperature coefficient at Ta = 25℃.

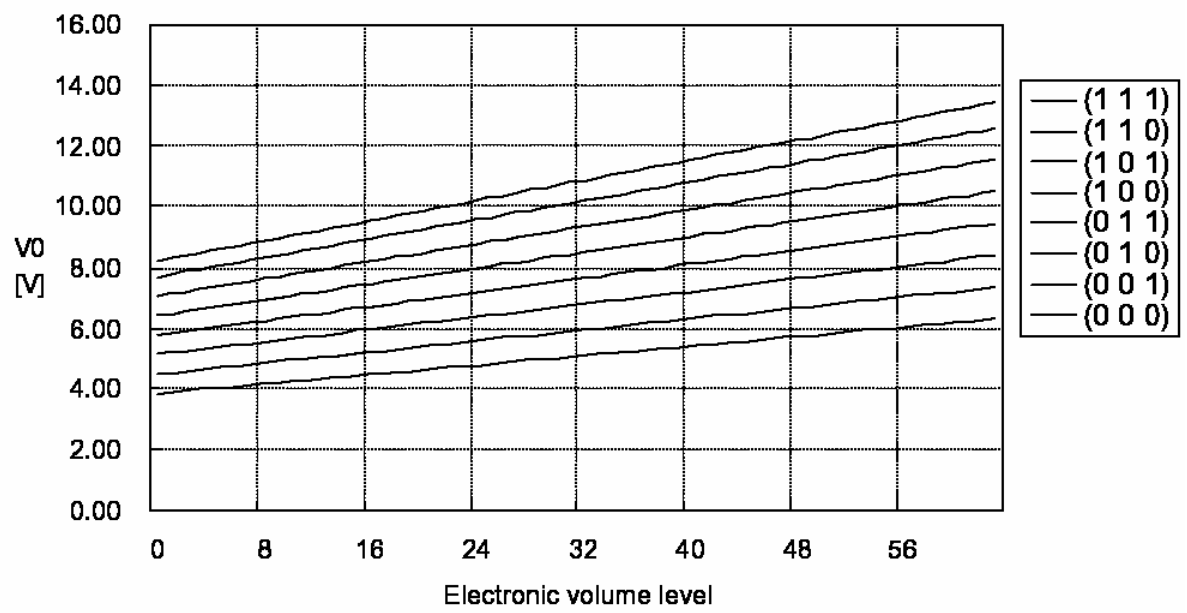

Figure 5. Electronic Volume Level

In Case of Using External Resistors, Ra and Rb. (INTRS = "L")

When INTRS pin is "L", it is necessary to connect external regulator resistor Ra between VR and VSS, and Rb between V0 and VR. Example: For the following requirements

1. LCD driver voltage, V0 = 10V
2. 6-bit reference voltage register = (1, 0, 0, 0, 0, 0)
3. Maximum current flowing Ra, Rb = 1uA

From Eq. 1

$10 = (1 + Rb/ Ra) \times V_{EV}$ [V] ------ (Eq. 3)

From Eq. 2

$V_{EV}=(1-(63-32)/162) \times 2.1 = 1.698$ [V]-------(Eq. 4)

From requirement 3.

$10 / (Rb + Ra)=1$ [uA] ------ (Eq. 5) From equations Eq.3, 4 and 5

Ra =1.69 [MO] Rb = 8.31 [MO]

The following table shows the range of V0 depending on the above requirements.

Table 2. V0 Depending on Electronic Volume Level

	Electronic volume level				
	0	…	32	…	63
V0	7.57	…	10.00	…	12.43

11. User instruction Definitions

11.1 Instruction table

Command	Command Code										Function
	A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1	D0	
(1) Display ON/OFF	0	1	0	1	0	1	0	1	1	1	0 1	LCD display ON/OFF 0: OFF, 1: ON
(2) Display start line set	0	1	0	0	1	Display start address						Sets the display RAM display start line address
(3) Page address set	0	1	0	1	0	1	1	Page address				Sets the display RAM page address
(4) Column address set upper bit Column address set lower bit	0 0	1 1	0 0	0 0	0 0	0 0	1 0	Most significant column address Least significant column address				Sets the most significant 4 bits of the display RAM column address. Sets the least significant 4 bits of the display RAM column address.
(5) Status read	0	0	1	Status				0	0	0	0	Reads the status data
(6) Display data write	1	1	0	Write data								Writes to the display RAM
(7) Display data read	1	0	1	Read data								Reads from the display RAM
(8) ADC select	0	1	0	1	0	1	0	0	0	0	0 1	Sets the display RAM address SEG output correspondence 0: normal, 1: reverse
(9) Display normal/ reverse	0	1	0	1	0	1	0	0	1	1	0 1	Sets the LCD display normal/ reverse 0: normal, 1: reverse
(10) Display all points ON/OFF	0	1	0	1	0	1	0	0	1	0	0 1	Display all points 0: normal display 1: all points ON
(11) LCD bias set	0	1	0	1	0	1	0	0	0	1	0 1	Sets the LCD drive voltage bias ratio 0: 1/9 bias, 1: 1/7 bias (ST7565R)
(12) Read/modify/write	0	1	0	1	1	1	0	0	0	0	0	Column address increment At write: +1 At read: 0
(13) End	0	1	0	1	1	1	0	1	1	1	0	Clear read/modify/write
(14) Reset	0	1	0	1	1	1	0	0	0	1	0	Internal reset
(15) Common output mode select	0	1	0	1	1	0	0	0 1	*	*	*	Select COM output scan direction 0: normal direction 1: reverse direction
(16) Power control set	0	1	0	0	0	1	0	1	Operating mode			Select internal power supply operating mode
(17) Vo voltage regulator internal resistor ratio set	0	1	0	0	0	1	0	0	Resistor ratio			Select internal resistor ratio(Rb/Ra) mode
(18) Electronic volume mode set Electronic volume register set	0	1	0	1 0	0 0	0 Electronic volume value	0	0	0	0	1	Set the Vo output voltage electronic volume register
(19) Static indicator ON/OFF Static indicator register set	0	1	0	1 0	0 0	1 0	0 0	1 0	1 0	0 0	0 1 Mode	0: OFF, 1: ON Set the flashing mode
(20) Booster ratio set	0	1	0	1 0	1 0	1 0	1 0	1 0	0 0	0 step-up value	0	select booster ratio 00: 2x,3x,4x 01: 5x 11: 6x
(21) Power saver												Display OFF and display all points ON compound command
(22) NOP	0	1	0	1	1	1	0	0	0	1	1	Command for non-operation
(23) Test	0	1	0	1	1	1	1	*	*	*	*	Command for IC test. Do not use this command

11.2 Instruction Description

1) Display ON / OFF Turns the Display ON or OFF

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	1	1	1	DON

DON = 1: display ON

DON = 0: display OFF

2) Initial Display Line

Sets the line address of display RAM to determine the Initial Display Line. The top row

(COM0 when SHL= L, COM63 when SHL = H) of LCD panel.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	1	ST5	ST4	ST3	ST2	ST1	ST0

ST5	ST4	ST3	ST2	ST1	ST0	Line address
0	0	0	0	0	0	0
0	0	0	0	0	1	1
:	:	:	:	:	:	:
1	1	1	1	1	0	62
1	1	1	1	1	1	63

3) Set Page Address

Sets the Page Address of display data RAM from the microprocessor into the Page Address register. Any RAM data bit can be accessed when its Page Address and column address are specified. Along with the column address, the Page Address defines the address of the display RAM to write or read display data. Changing the Page Address doesn't effect to the display status.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	1	P3	P2	P1	P0

P3	P2	P1	P0	Page address
0	0	0	0	0
0	0	0	1	1
:	:	:	:	:
0	1	1	1	7
1	0	0	0	8

4) Set Column Address

Sets the Column Address of display RAM from the microprocessor into the Column Address register. Along with the Column Address, the Column Address defines the address of the display RAM to write or read display data. When the microprocessor reads or writes display data to or from display RAM, Column Addresses are automatically increased.

Set Column Address MSB

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	1	Y7	Y6	Y5	Y4

Set Column Address LSB

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	0	0	Y3	Y2	Y1	Y0

Y7	Y6	Y5	Y4	Y3	Y2	Y1	Y0	Column ddress
0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	1	1
:	:	:	:	:	:	:	:	:
1	0	0	0	0	0	1	0	130
1	0	0	0	0	0	1	1	131

5) Read Status (For parallel interface only)

Indicates the internal status of the LCM

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	1	BUSY	ADC	ON/OFF	/RST	0	0	0	0

Flag	Description
BUSY	The device is busy when internal operation or reset. Any instruction is rejected until BUSY goes Low. 0: chip is active, 1: chip is being busy.
ADC	Indicates the relationship between RAM column address and segment driver 0: reverse direction (SEG131->SEG0), 1: normal direction (SEG0->SEG131)
ON/OFF	Indicates display ON/OFF status 0: display ON, 1: display OFF
/RST	Indicates the initialization is in progress by /RST signal 0: chip is active, 1: chip is being reset

6) Write Display Data

8-bit data of display data from the microprocessor can be written to the RAM location specified by the column address and page address. The column address is increased by 1 automatically so that the microprocessor can continuously write data to the addressed page.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
1	0	Write data							

7) Read Display Data

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
1	1	Read data							

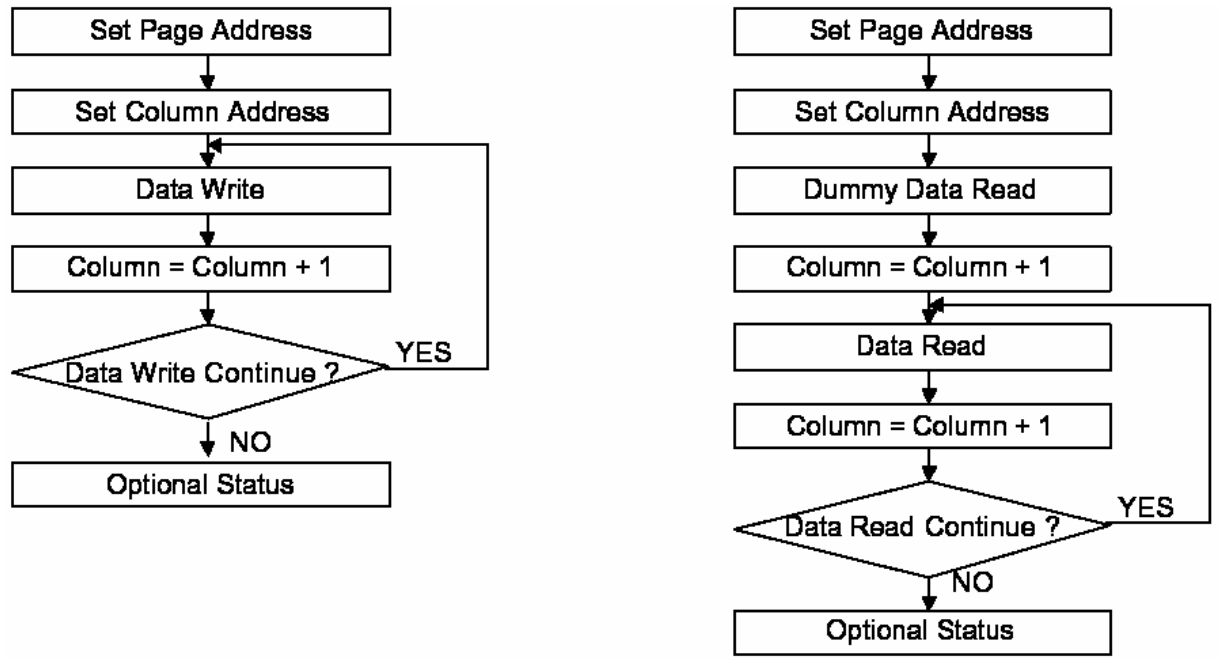

Figure 6. Sequence for Writing Display Data **Figure7. Sequence for Reading Display Data**

8) ADC Select (Segment Driver Direction Select)

Changes the relationship between RAM column address and segment driver. The direction of segment driver output pins can be reversed by software. This makes IC layout flexible in LCD module assembly.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	0	0	0	ADC

ADC = 0: normal direction (SEG0->SEG131)

ADC = 1: reverse direction (SEG131->SEG0)

9) Reverse Display ON / OFF

Reverses the display status on LCD panel without rewriting the contents of the display data RAM.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	0	1	1	REV

REV	RAM bit data = "1"	RAM bit data = "0"
0(normal)	LCD pixel is illuminated	LCD pixel is not illuminated
0(reverse)	LCD pixel is not illuminated	LCD pixel is illuminated

10) Entire Display ON / OFF

Forces the whole LCD points to be turned on regardless of the contents of the display data RAM. At this time, the contents of the display data RAM are held. This instruction has priority over the reverse display ON / OFF instruction.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	0	1	0	EON

EON = 0: normal display

EON = 1: entire display ON

11) Select LCD Bias

Selects LCD bias ratio of the voltage required for driving the LCD.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	0	0	1	Bias

Bias = 0: 1/9 Duty Bias = 1: 1/7 Duty

12) Set Modify-Read

This instruction stops the automatic increment of the column address by the read display data instruction, but the column address is still increased by the write display data instruction. And it reduces the load of microprocessor when the data of a specific area is repeatedly changed during cursor blinking or others. This mode is canceled by the reset Modify-read instruction.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	1	1	0	0	0	0	0

13) Reset Modify-Read

This instruction cancels the Modify-read mode, and makes the column address return to its initial value just before the set Modify-read instruction is started.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	1	1	0	1	1	1	0

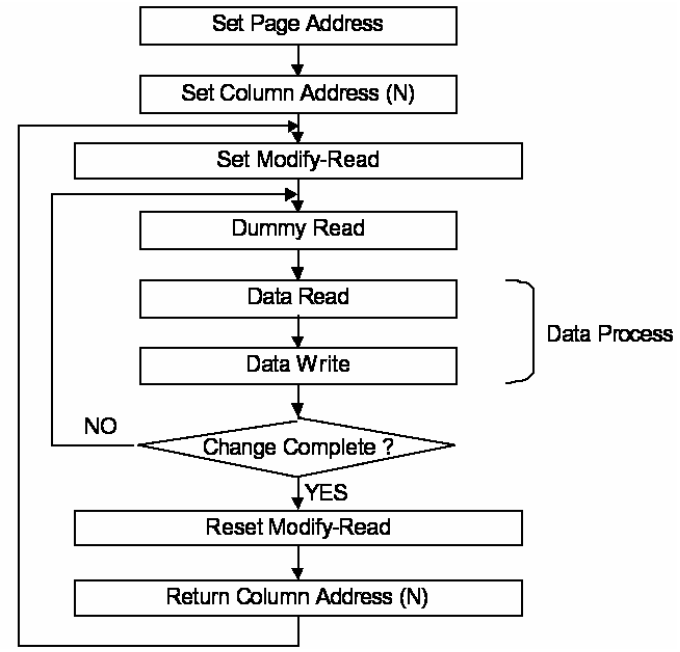

Figure 8. Sequence for Cursor Display

14) Reset

This instruction resets initial display line, column address, page address, and common output status select to their initial status, but dose not affect the contents of display data RAM. This instruction cannot initialize the LCD power supply, which is initialized by the /RST pin.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	1	1	0	0	0	1	0

15) SHL Select (Common Output Mode Select)

COM output scanning direction is selected by this instruction which determines the LCD driver output status. *: Don't care

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	1	0	0	SHL	*	*	*

SHL = 0: normal direction (COM0-> COM63)

SHL = 1: reverse direction (COM63->COM0)

16) Power Control

Selects one of eight power circuit functions by using 3-bit register. An external power supply and part of internal power supply functions can be used simultaneously.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	1	0	1	VC	VR	VF

VC	VR	VF	Page address
0			Internal voltage converter circuit is OFF
1			Internal voltage converter circuit is ON
	0		Internal voltage regulator circuit is OFF
	1		Internal voltage regulator circuit is ON
		0	Internal voltage follower circuit is OFF
		1	Internal voltage follower circuit is ON

17) Regulator Resistor Select

Selects resistance ratio of the internal resistor used in the internal voltage regulator. See voltage regulator section in power supply circuit. Refer to the following table.

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	0	0	1	0	0	R2	R1	R0

R2	R1	R0	(1 + Rb / Ra) ratio
0	0	0	3.0
0	0	1	3.5
0	1	0	4.0
0	1	1	4.5
1	0	0	5.0 (default)
1	0	1	5.5
1	1	0	6.0
1	1	1	6.4

18) Reference Voltage Select

Consists of 2-byte instruction. The 1st instruction sets reference voltage mode, the 2 one updates the contents of reference voltage register. After second instruction, reference voltage mode is released.

The 1st Instruction: Set Reference Voltage Select Mode

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	0	0	0	0	0	1

The 2nd Instruction: Set Reference Voltage Register

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	x	X	SV5	SV4	SV3	SV2	SV1	SV0

SV5	SV4	SV3	SV2	SV1	SV0	Reference voltage parameter (a)	V0	Contrast
0	0	0	0	0	0	0	Minimum	Low
0	0	0	0	0	1	1	:	:
:	:	:	:	:	:	:	:	:
1	0	0	0	0	0	32 (default)	:	:
:	:	:	:	:	:	:	:	:
1	1	1	1	1	0	62	:	:
1	1	1	1	1	1	63	Maximum	High

19) Set Static Indicator State

Consists of two bytes instruction. The first byte instruction (set Static Indicator mode) enables the second byte instruction (set Static Indicator register) to be valid. The first byte sets the Static Indicator ON / OFF. When it is ON, the second byte updates the contents of Static Indicator register without issuing any other instruction and this Static Indicator state is released after setting the data of indicator register.

The 1st Instruction: Set Static Indicator Mode (ON / OFF)

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	1	0	1	0	1	1	0	SM

SM = 0: static indicator OFF

SM = 1: static indicator ON

The 2nd Instruction: Set Static Indicator Register

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	x	x	x	x	x	x	S1	S0

S1	S0	Status of static indicator output
0	0	OFF
0	1	ON (about 1 second blinking)
1	0	ON (about 0.5 second blinking)
1	1	ON (always ON)

20)NOP No Operation Instruction

RS	RW	DB7	DB6	DB5	DB4	DB3	DB2	DB1	DB0
0	0	x	x	x	x	x	x	S1	S0

21) **Power Save (Compound Instruction)**

If the entire display ON/OFF instruction is issued during the display OFF state, ST7565P enters the Power Save status to reduce the power consumption to the static power consumption value. According to the status of static indicator mode, Power Save is entered to one mode of sleep and standby mode. When Static Indicator mode is ON, standby mode is issued. When OFF, sleep mode is issued. Power Save mode is released by the entire display OFF instruction.

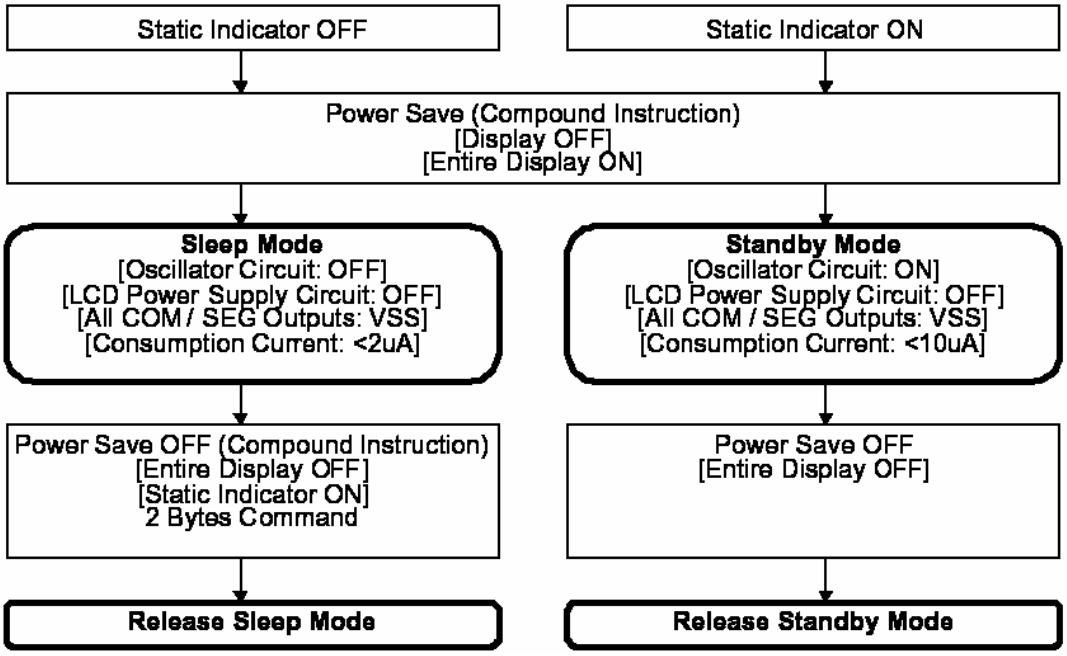

Figure 9. Power Save (Compound Instruction)

-Sleep Mode

This stops all operations in the LCD display system, and as long as there are no access from the MPU, the consumption current is reduced to a value near the static current. The internal modes during sleep mode are as follows:

a. The oscillator circuit and the LCD power supply circuit are halted.VSS level.

b. All liquid crystal drive circuits are halted, and the segment in common drive outputs output a VSS level.

- Standby Mode

The duty LCD display system operations are halted and only the static drive system for the indicator

continues to operate, providing the minimum required consumption current for the static drive.

The internal modes are in the following states during standby mode.

a. The LCD power supply circuits are halted. The oscillator circuit continues to operate.

b. The duty drive system liquid crystal drive circuits are halted and the segment and common driver outputs a VSS level. The static drive system does not operate.
When a reset command is performed while in standby mode, the system enters sleep mode.

12. Timing Characteristics

Read / Write Characteristics (8080-series MPU) (For parallel interface only)

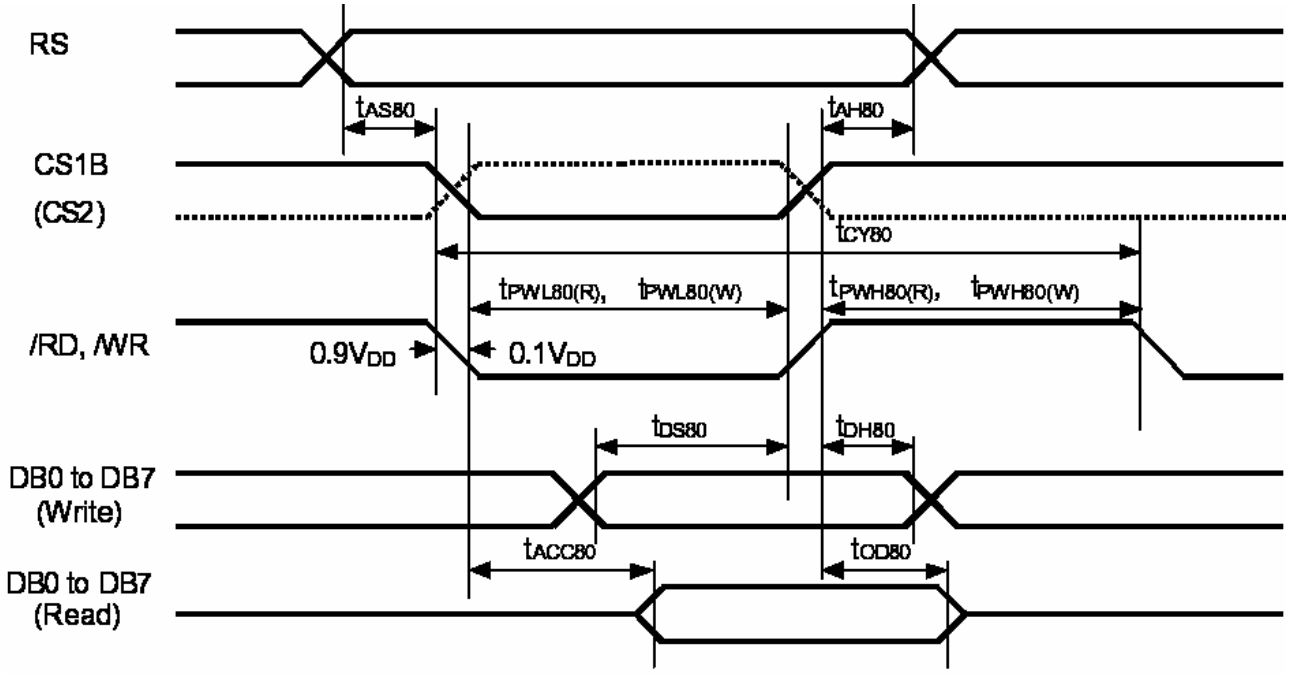

** tPWL80(W) and tPWL80(R) is specified in the overlapped period when CS1B is low (CS2 is high) and /WR(/RD) is low.

Figure 10. Read / Write Characteristics (8080-series MPU)

(VDD = 2.4 to 3.6V, Ta = -40 to +85°C)

Item		Signal	Symbol	Min.	Typ.	Max.	Unit	Remark
Address setup time Address hold time		RS	tAS80 tAH80	0 0	-	-	ns	
System cycle time		/WR, /RD	tCY80	300	-	-	ns	
Enable Pulse Low width	Read	/RD	tPWL80 (R)	120	-	-	ns	
	Write	/WR	tPWL80 (W)	60	-	-	ns	
Enable Pulse High width	Read	/RD	tPWH80 (R)	60	-	-	ns	
	Write	/WR	tPWH80 (W)	60	-	-	ns	
Data setup time Data hold time		DB7 To DB0	tDS80 tDH80	40 15	-	-	ns	
Read access time Output disable time			tACC80 tOD80	- 10	-	140 100	ns	CL = 100 pF

Read / Write Characteristics (6800-series Microprocessor)

(For parallel interface only)

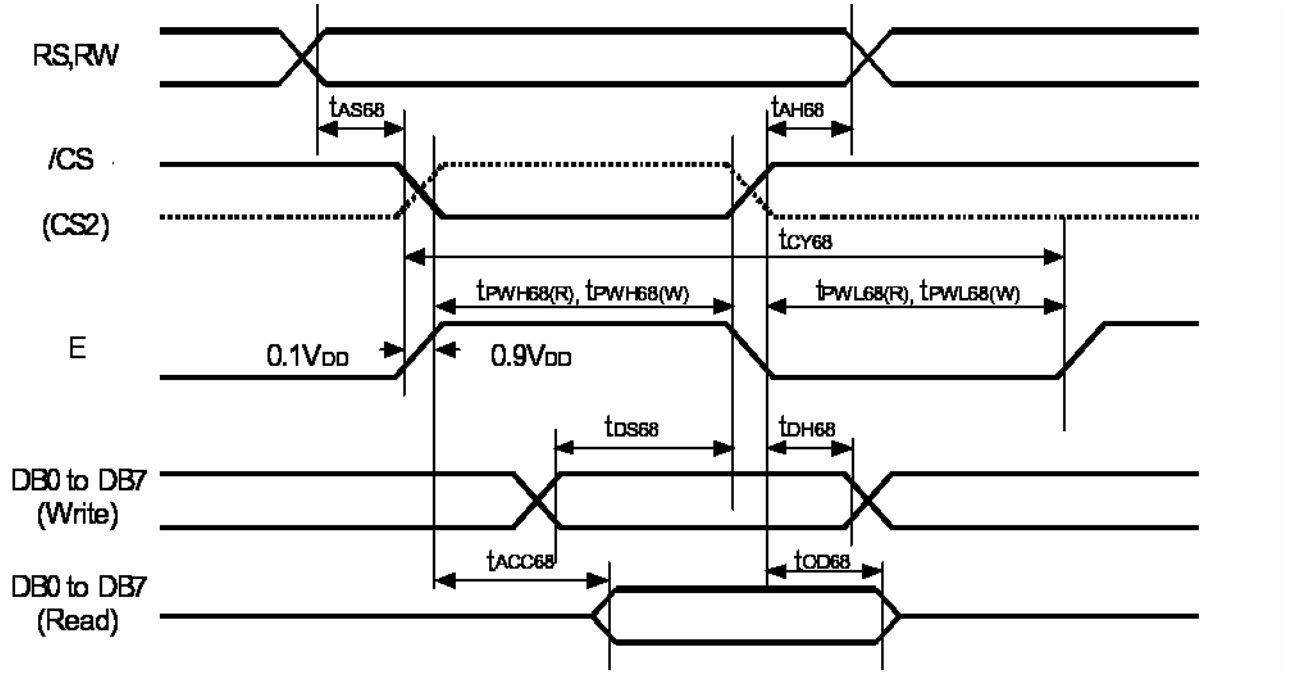

** tPWH68(W) and tPWH68(R) is specified in the overlapped period when /CS is low (CS2 is high) and E is high.

Figure 11. Read / Write Characteristics (6800-series Microprocessor)

(VDD = 2.4 to 3.3V, Ta = -40 to +85°C)

Item		Signal	Symbol	Min.	Typ.	Max.	Unit	Remark
Address setup time Address hold time		RS,RW	tAS68 tAH68	0 0	-	-	ns	
System cycle time		E	tCY68	300	-	-	ns	
Enable Pulse High Width	Read	E	tPWH68 (R)	120			ns	
	Write		tPWH68 (W)	60				
Enable Pulse Low Width	Read	E	tPWL68 (R)	60			ns	
	Write		tPWL68 (W)	60				
Data setup time Data hold time		DB7 To DB0	tDS68 tDH68	40 15	-	-	ns	
Access time Output disable time			tACC68 tOD68	- 10	-	140 100	ns	CL = 100 pF

Serial Interface Characteristics

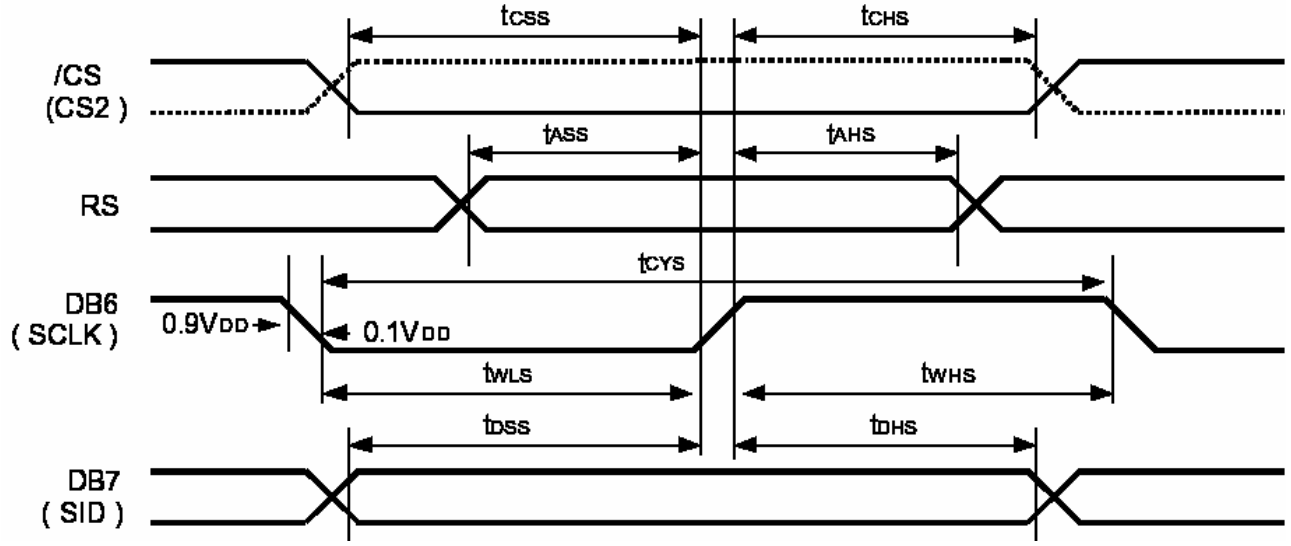

Figure 12. Serial Interface Characteristics

(VDD = 2.4 to 3.3V, Ta = -40 to +85°C)

Item	Signal	Symbol	Min.	Typ.	Max.	Unit	Remark
Serial clock cycle SCLK high pulse width SCLK low pulse width	DB6 (SCLK)	tCYS tWHS tWLS	250 100 100	- - -	- - -	ns	
Address setup time Address hold time	RS	tASS tAHS	150 150	- -	- -	ns	
Data setup time Data hold time	DB7 (SID)	tDSS tDHS	100 100	- -	- -	ns	
/CS setup time /CS hold time	/CS	tCSS tCHS	150 150	- -	- -	ns	

Reset Input Timing

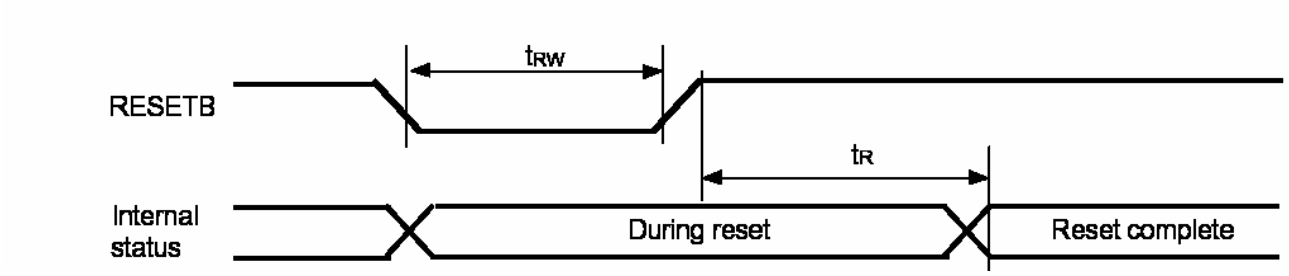

Figure 13. Reset Input Timing

(VDD = 2.4 to 3.6V, Ta = -40 to +85°C)

Item	Signal	Symbol	Min.	Typ.	Max.	Unit	Remark
Reset low pulse width	RESETB	tRW	1.0	-	-	µs	
Reset time	-	tR	-	-	1.0	µs	

13.Initializing flow chart

- **Referential Instruction Setup Flow (1)**

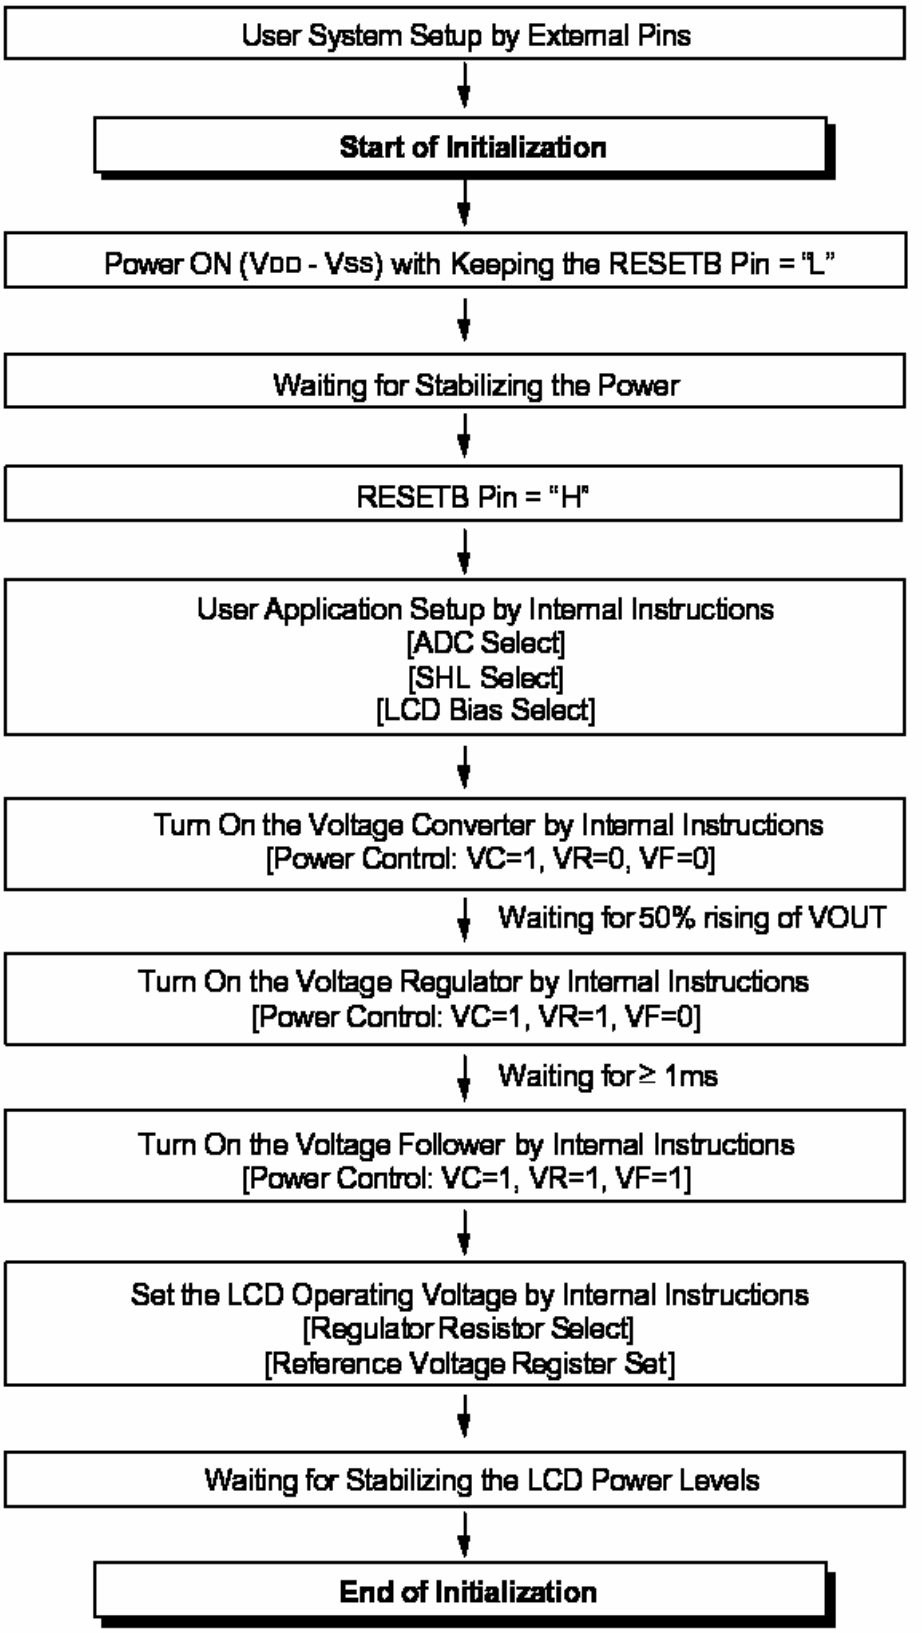
User System Setup by External Pins
Start of Initialization
Power ON (VDD - Vss) with Keeping the RESETB Pin = "L"
Waiting for Stabilizing the Power
RESETB Pin = "H"
User Application Setup by Internal Instructions
[ADC Select]
[SHL Select]
[LCD Bias Select]
Turn On the Voltage Converter by Internal Instructions
[Power Control: VC=1, VR=0, VF=0]
Waiting for 50% rising of VOUT
Turn On the Voltage Regulator by Internal Instructions
[Power Control: VC=1, VR=1, VF=0]
Waiting for ≥ 1ms
Turn On the Voltage Follower by Internal Instructions
[Power Control: VC=1, VR=1, VF=1]
Set the LCD Operating Voltage by Internal Instructions
[Regulator Resistor Select]
[Reference Voltage Register Set]
Waiting for Stabilizing the LCD Power Levels
End of Initialization

Figure 14. Initializing with the Built-in Power Supply Circuits interface mode

- **Referential Instruction Setup Flow (2)**

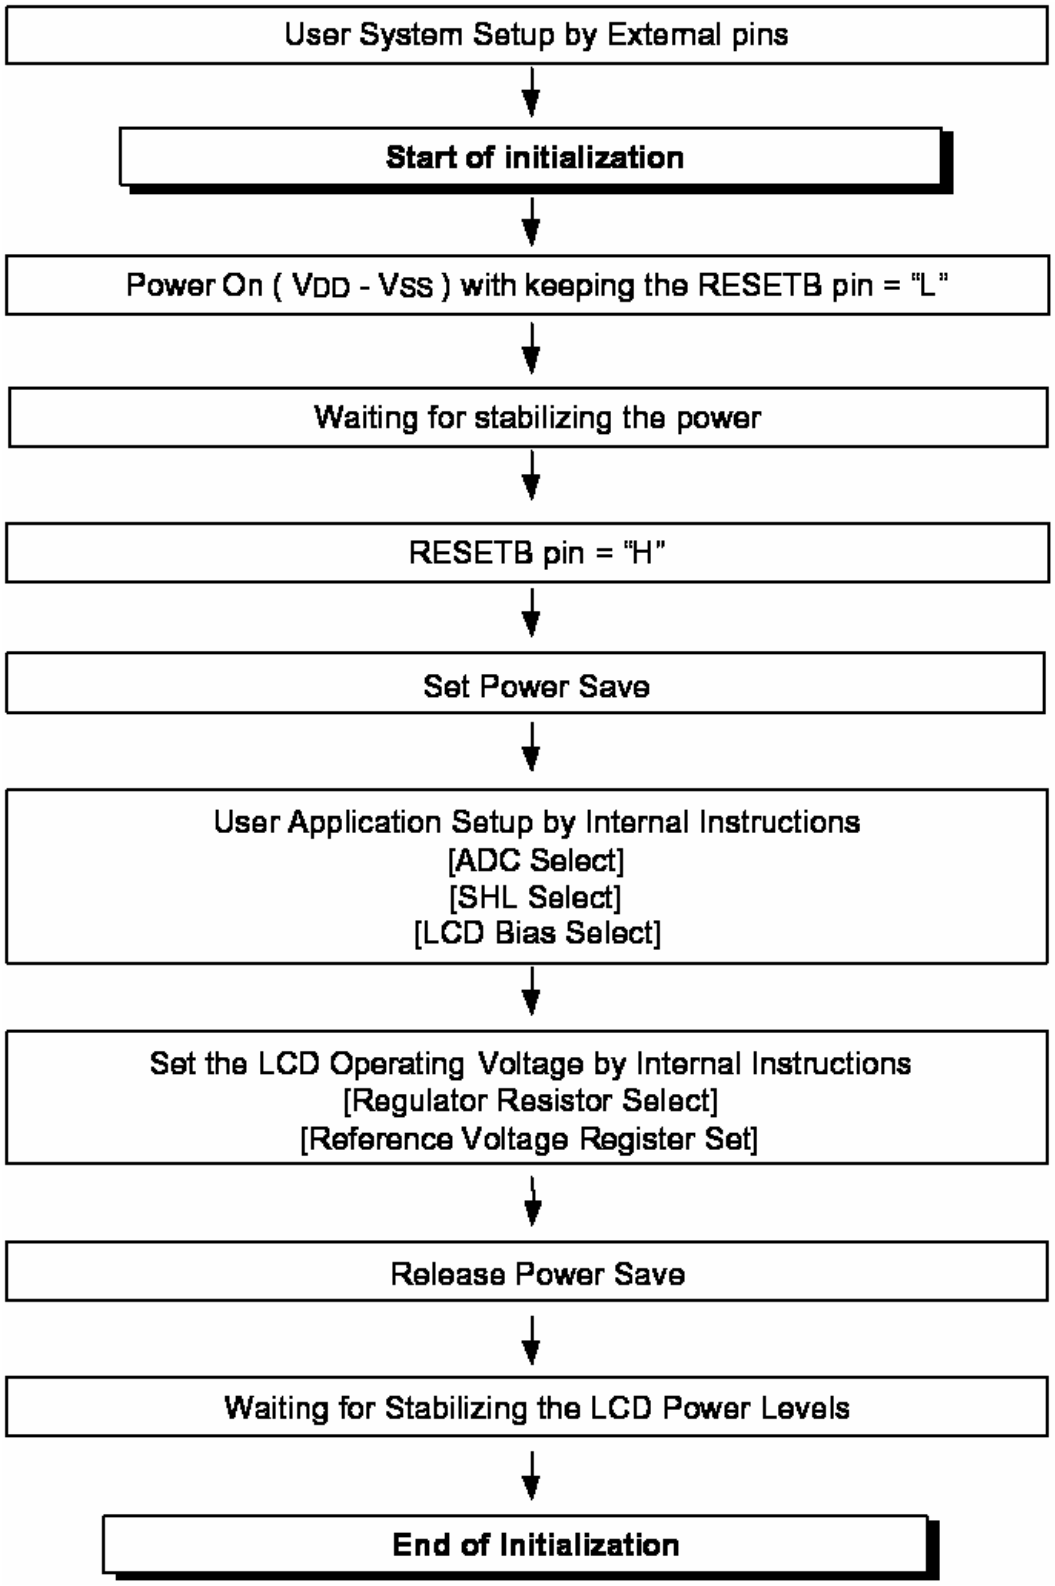
User System Setup by External pins
Start of initialization
Power On (VDD - Vss) with keeping the RESETB pin = "L"
Waiting for stabilizing the power
RESETB pin = "H"
Set Power Save
User Application Setup by Internal Instructions
[ADC Select]
[SHL Select]
[LCD Bias Select]
Set the LCD Operating Voltage by Internal Instructions
[Regulator Resistor Select]
[Reference Voltage Register Set]
Release Power Save
Waiting for Stabilizing the LCD Power Levels
End of Initialization

Figure 15. Initializing without the Built-in Power Supply Circuits

- **Referential Instruction Setup Flow (3)**

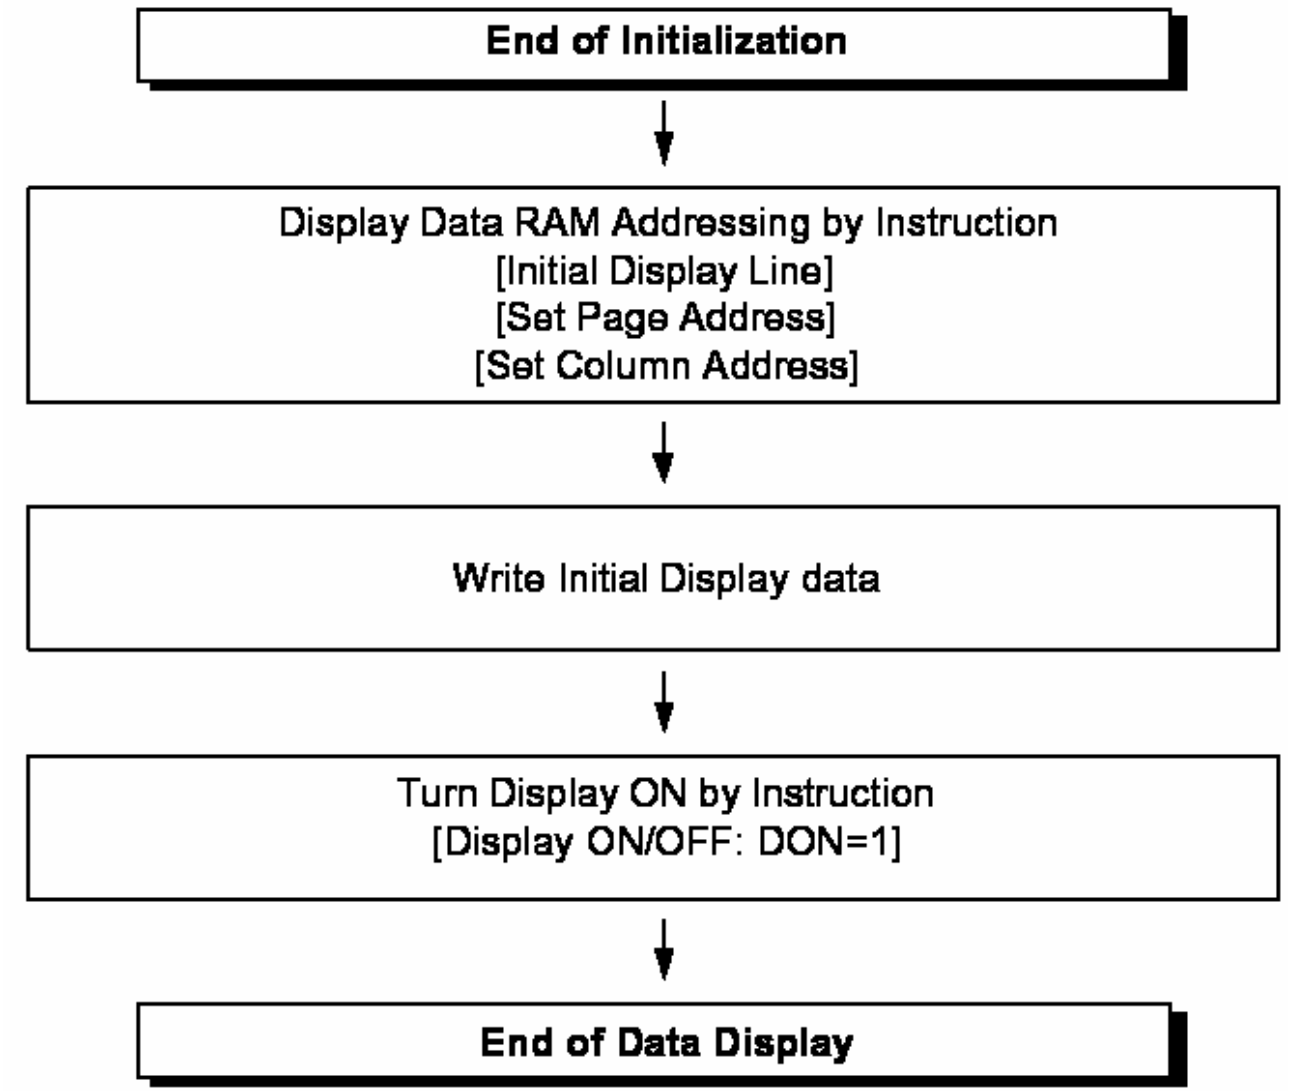

Figure 16. Data Displaying

- **Referential Instruction Setup Flow (4)**

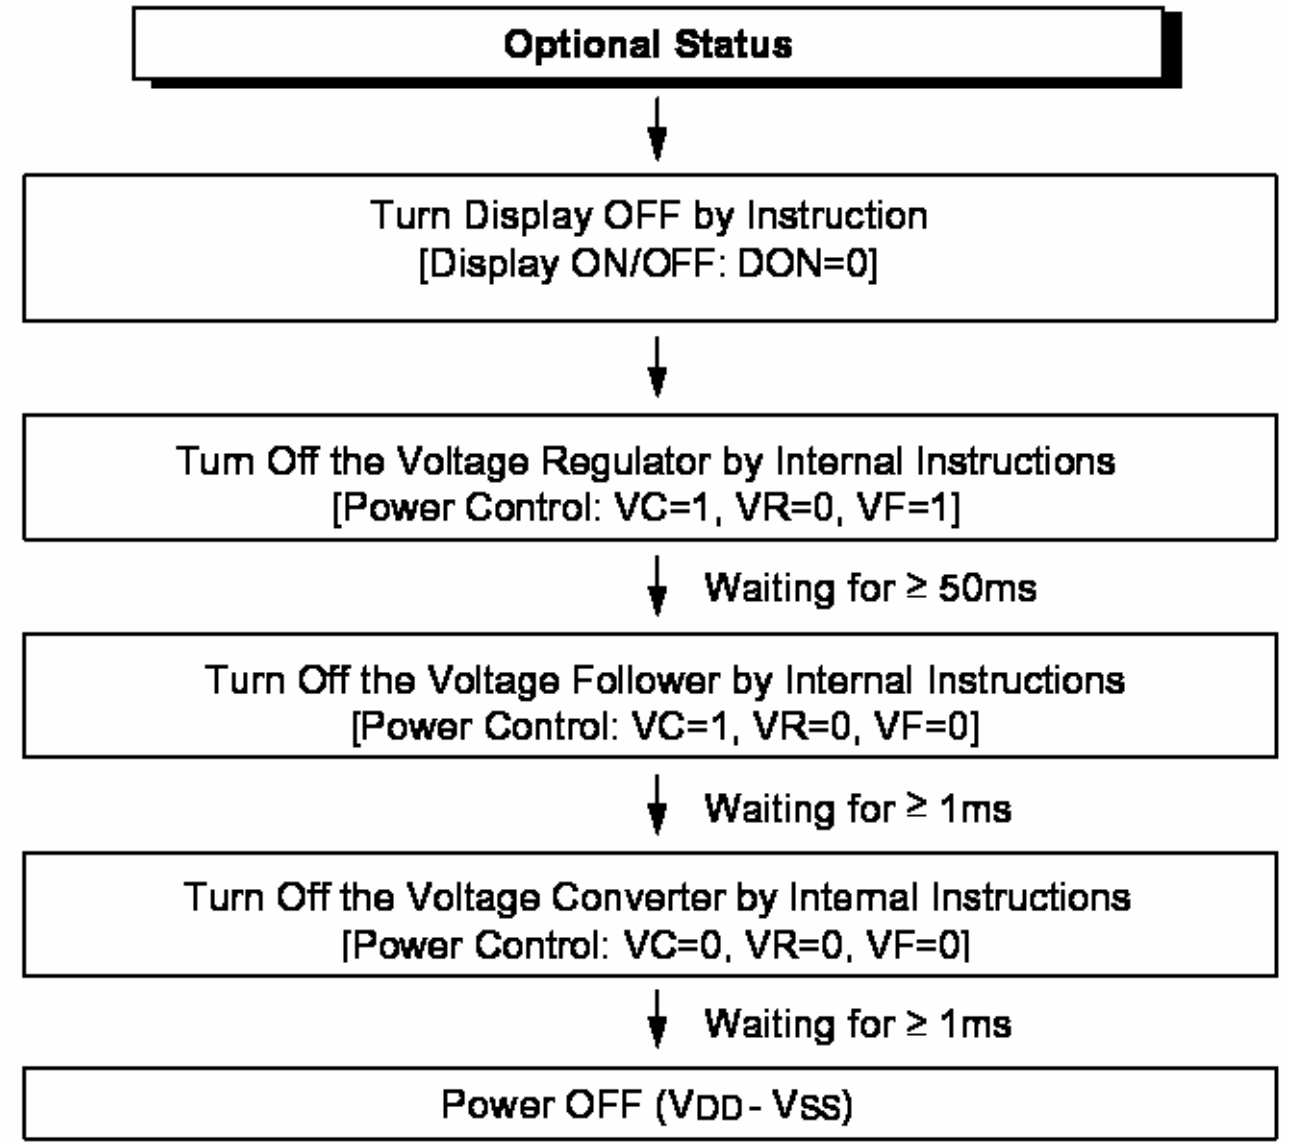
Optional Status
Turn Display OFF by Instruction
[Display ON/OFF: DON=0]
Turn Off the Voltage Regulator by Internal Instructions
[Power Control: VC=1, VR=0, VF=1]
Waiting for ≥ 50ms
Turn Off the Voltage Follower by Internal Instructions
[Power Control: VC=1, VR=0, VF=0]
Waiting for ≥ 1ms
Turn Off the Voltage Converter by Internal Instructions
[Power Control: VC=0, VR=0, VF=0]
Waiting for ≥ 1ms
Power OFF (VDD - VSS)

Figure 17. Power OFF

14. Display Data RAM Map

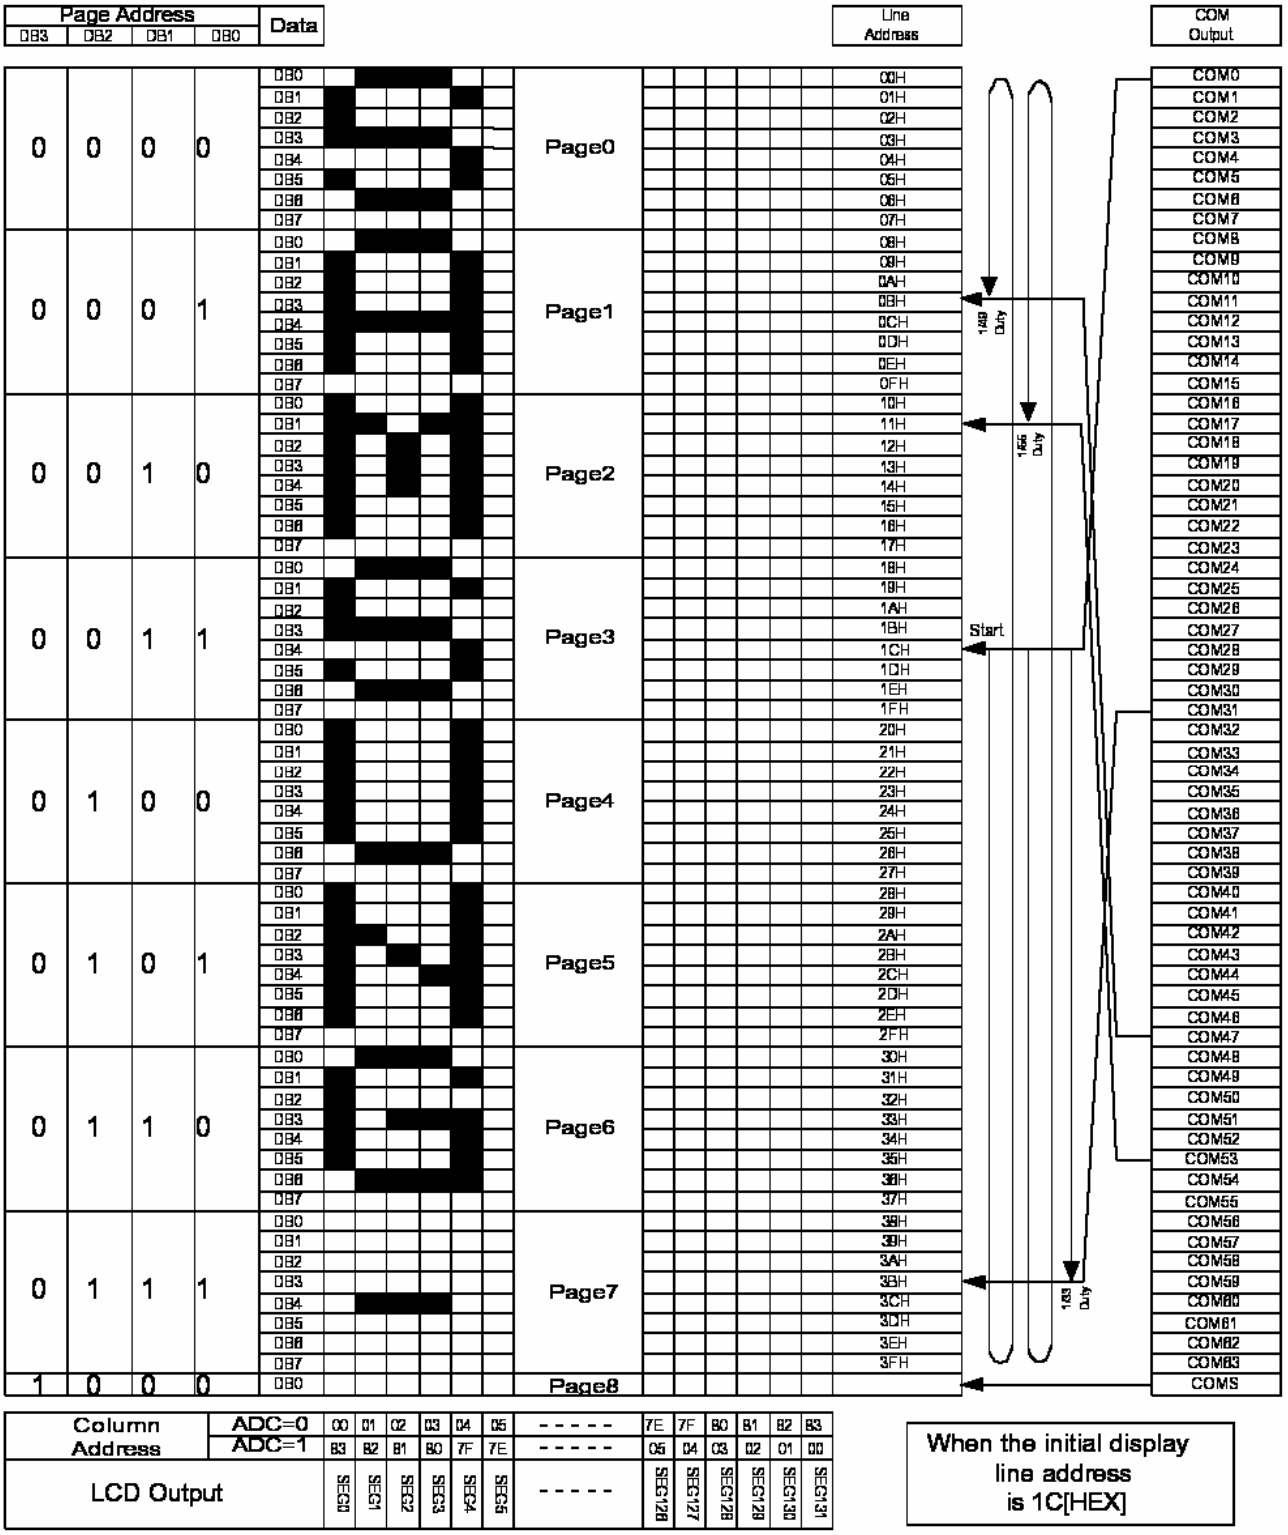

15. Revision records

Version	Ref.pages	Revision Items	Date
A00	All pages	New release	2011.10.16